


PM-522

Quick Installation Guide



©2014 RuggON Corporation. All rights reserved.


Accessory




PM-522



Rubber Bumpers



Power Adapter



Mini USB to RJ45 Dongle



2-Point Shoulder Strap



4-Point Handstrap




Stylus




Hitch D-rings (Attaching straps)

Overview

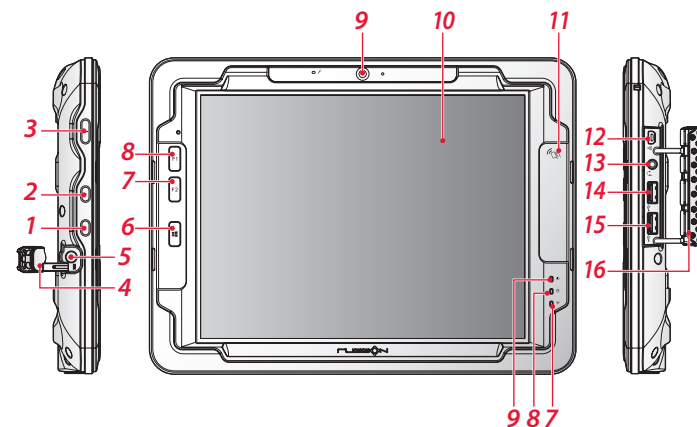

- | | |
|------------------|--------------------------|
| 1 RF setting key | 9 Front camera |
| 2 Lock key | 10 Touch screen |
| 3 Power key | 11 NFC sensing area |
| 4 DC-IN cover | 12 Mini USB |
| 5 DC-IN jack | 13 Audio jack |
| 6 Home key | 14 USB 3.0 |
| 7 F2 key | 15 USB 2.0 |
| 8 F1 key | 16 I/O compartment cover |

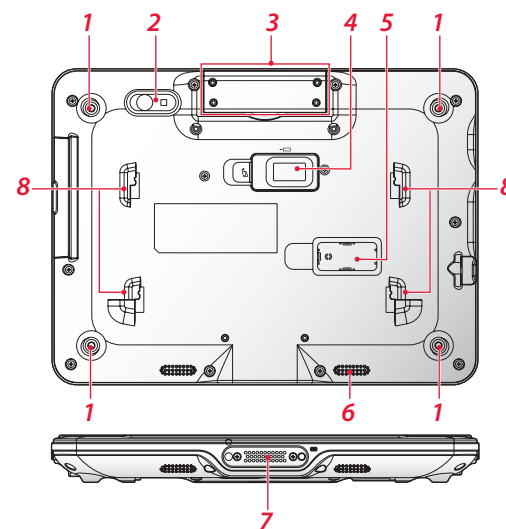


- | | |
|------------------------------------|---------------------------------------|
| 1 Securing holes | 5 Battery connector cover placeholder |
| 2 Rear camera | 6 Speakers |
| 3 Add-on cover | 7 Docking connector |
| 4 External battery connector cover | 8 External battery bracket slots |

Bumper

Caution: Warranty is void if rubber bumpers are not properly installed.


1. Align the screw holes on the bumpers with the screw holes on the PM-522.
2. Install the bumpers to the PM-522. If the display's protective film is in the way, lift it up slightly to allow for proper installation.



Note: The left bumper fits over three keys (left side panel) and the DC-IN compartment and the right bumper fits over the I/O port compartment.


3. Secure the bumpers and the PM-522 with screws.

Note: Once the rubber bumpers are installed, it is recommended to not remove them.

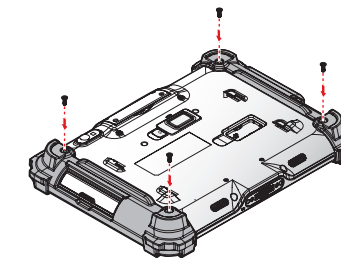


SIM Card


1. Remove the screws securing the add-on compartment cover.

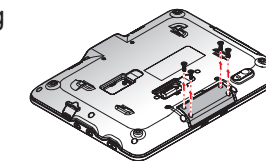

2. Flip the add-on compartment cover over to remove it.

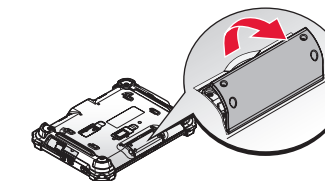


3. Take the micro SIM card from its packaging.
4. The micro SIM card has a corner missing. Align the SIM card with the slot making sure that the corners match.

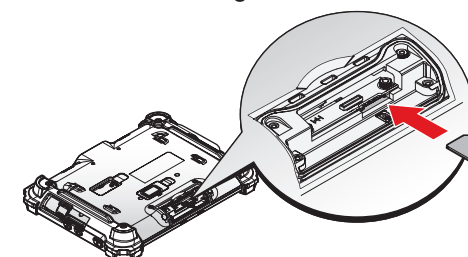

5. Insert the micro SIM card and press it in until an audible click sounds.

Strap


1. Remove the screws securing the bumpers.
2. Install the D-rings.
3. Attach the clips to the D-rings to attach the handstrap or shoulder strap.

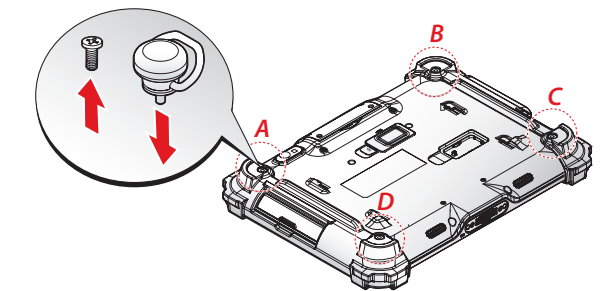

Note: Connect handstrap to D-rings A, B, C and D; shoulder strap to D-rings C and D.


Charging

1. Flip open the DC-IN cover to expose the DC-IN jack.
2. Connect the AC adapter to the DC-IN port.

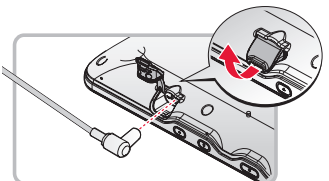

After charging the battery, disconnect the AC adapter and close the DC-IN cover.

1. Align the plastic tab on the DC-IN cover with the compartment.
2. Insert one end of the cover first and angle the cover to seat it in place.
3. Push in the cover to seal the DC-IN compartment.

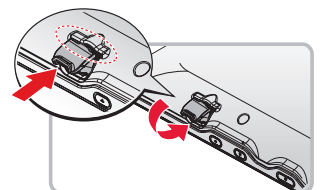

Power On

1. Flip up the external battery connector cover and lift it up.
2. Switch the DIP switch to the ON position.
3. Install the external battery cover over the battery connector.
4. Press and hold the power button until the screen lights. The device runs through the start up sequence and powers up.

